


Equipping a Fencer for Foil fencing

What Kit?

Assuming that you already have 800N Glove, 800N plastron, 350N Jacket, 350N Breeches, Electric Sabre Mask and an Electric Sabre you will also require the following equipment:

Assuming that you have already picked up an Electric Sabre you will also require the following equipment:

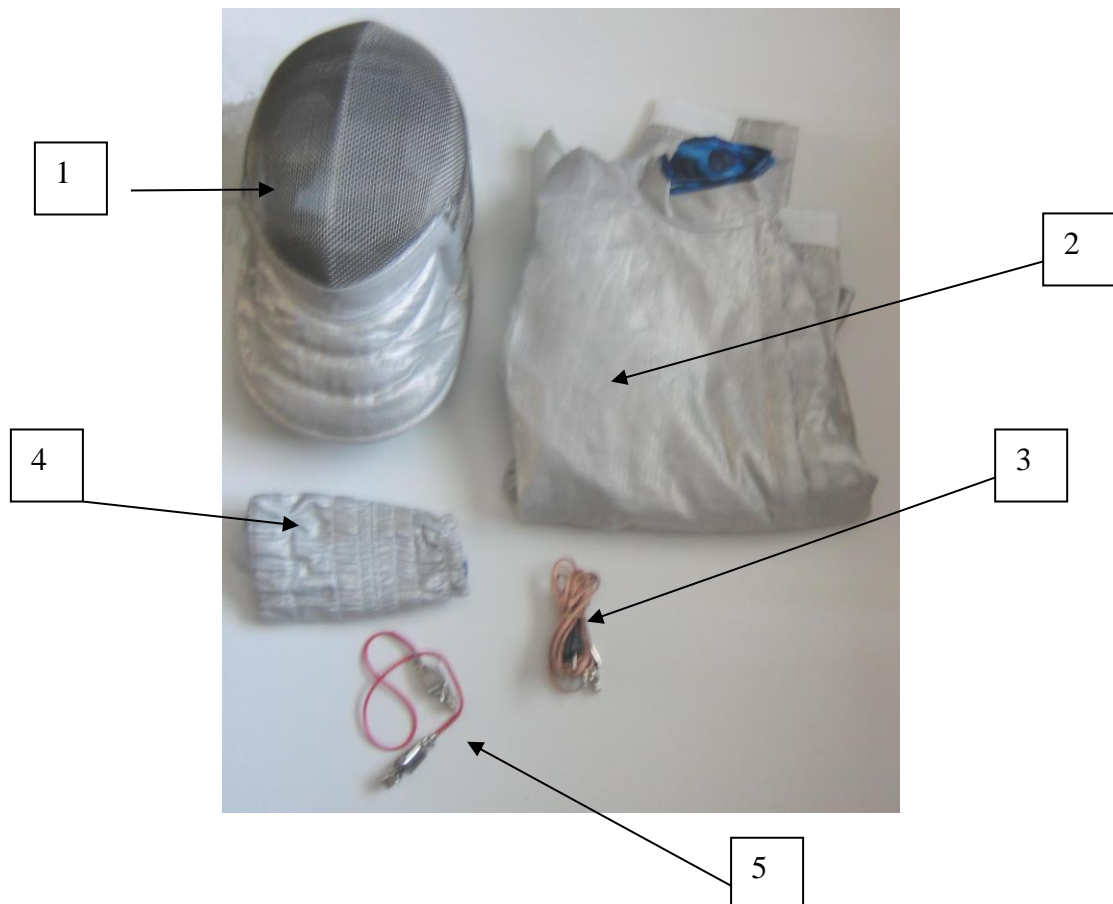

1. Electric Sabre Mask
2. Sabre Lame Jacket.
3. Sabre/Foil Body Wire (2 pin or Bayonet).
4. Lame Glove Overlay.
5. Mask to Jacket Connector

Connecting


1. Push the Foil connector plug of the body wire down the sleeve of your fencing jacket as shown:





2. Put your jacket on and also put the Lame Jacket on top of your jacket. Then connect the earth lead to the back, non-sword arm side of the Lame Jacket as shown below.



3. Connect the 3-pin plug into the Spool socket.

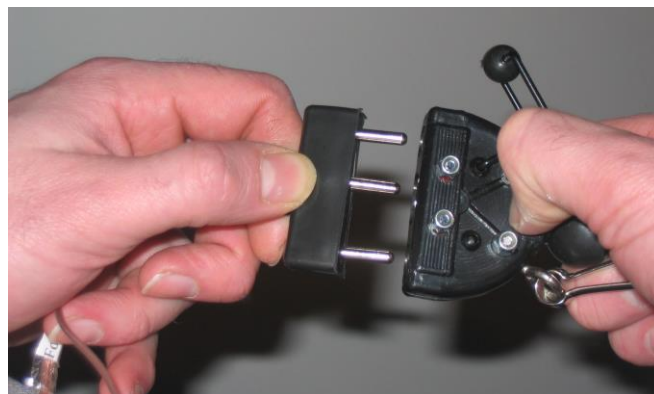

4. Fit the retaining clip to secure the plug-in place.

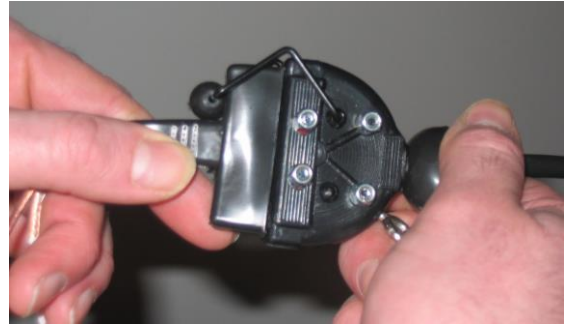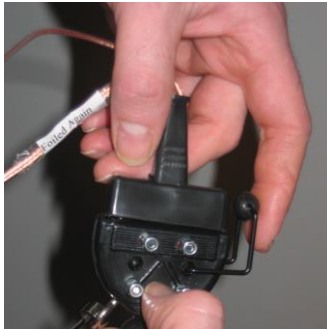

5. Then Clip the Spool socket to the Loop on the back of the Lamé Jacket.



6. Put on your fencing glove so that the sword plug is protruding through the side.




Note Side Velcro fastening 800N gloves to be used when using size 5 blades.

7. Now fit the Lame glove overlay over the top of your fencing glove



Note it is best to keep the overlay as close to your wrist as possible, as it becomes quite a squeeze to fit everything on

8. Now clip the Mask to Jacket Connector to the Lame Loop on the top of the Sabre Lame Jacket.

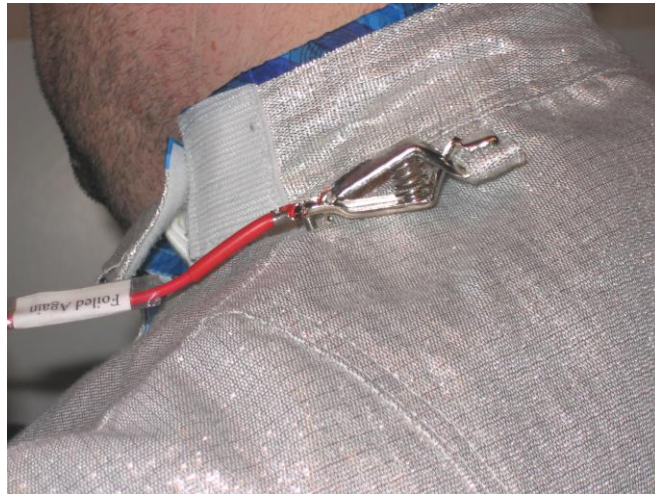

9. Now clip the other end of the Mask to Jacket connector to the top of the Electric sabre Mask.




Note there is no wire hook at the back of the mask instead it has a Velcro strap with a large disc to fit on the back of your head, in the case of the club, one size has to fit as many people as possible If you have your own Sabre mask then it would already be adjusted for yourself

10. Now pick up the Electric Sabre and Align the body wire plug with the socket on the Sabre Guard



11. Insert the plug and rotate clockwise to secure the plug-in place.

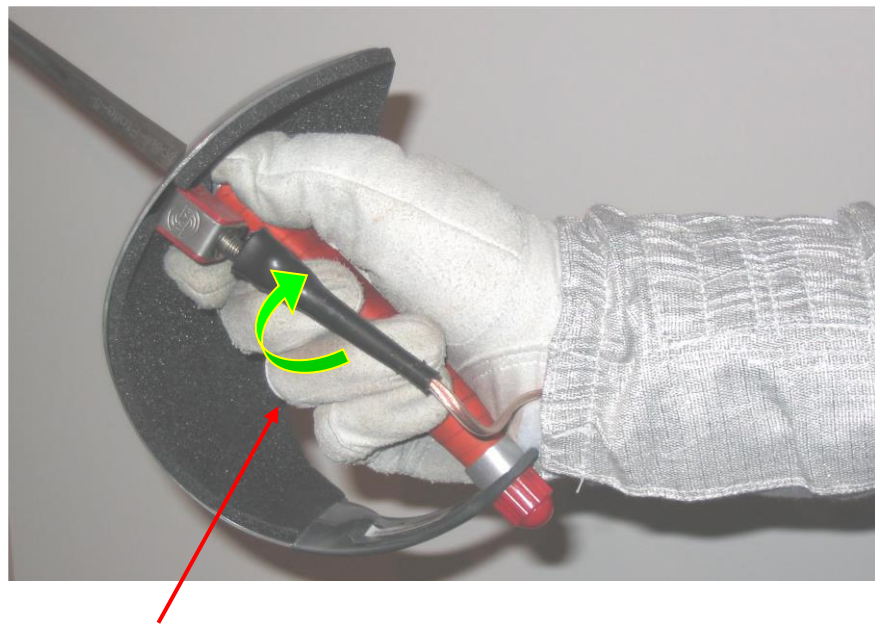

Plug is pushed in and rotated clockwise.

When your opponent is connected ensure, the box is set to SABRE and switch on. There should be no buzzing sound or white/green or red lights flashing.

To Test:

1. Hit your opponent on target only a green or red light should register. (Note when you hit your opponent the coloured light on your side of the box lights up to indicate that you have scored a hit)
2. Now hit your opponent off target NO LIGHTS WILL REGISTER ANY OFF TARGET HITS
3. Now hit On-target then Off-Target and only a COLOURED light should flash.
4. Now hit Off-Target and then On-Target and NO lights should flash.
5. Hit your opponent's Guard and no hits should register.

After the Bout

It is very important not to let the spool connector go when disconnecting the Fencers. This will cause the internal spool connectors to jump off their seating resulting in the spool not working.

**PLEASE GENTLY TAKE THE CONNECTOR
BACK TO THE SPOOL**

